

OptiPlex Micro Form Factor Mounting Options and Installation Methods

Summary: This article provides information about the current mounting options available for the OptiPlex Micro Form Factor chassis.


Article Content

Symptoms

The Dell OptiPlex Micro is a desktop form factor in the Dell commercial desktop portfolio.

OptiPlex Micro Mounting Options


The Dell OptiPlex Micro form Factor provides flexible computer deployment through various mounting options.

 **NOTE:** This article does not deal with the sale of these mounts. It only shows what is available for these computers and how to fit them. These mounts are usually bought at the point of purchase when buying your Micro computer. If you are looking to purchase one, then look on the Dell Sales site instead.


See the sections below for the current options available and the installation method involved.

Perform the following steps before working inside or on your computer.





1. Save and close all open files and exit all open applications.
2. Shut down your computer.
 - a. Click Start.
 - b. Click the Power icon.
 - c. Click Shut down.

 **NOTE:** If you are using a different operating system other than Windows 11, see the documentation of your operating system for shut-down instructions.

3. Disconnect all attached electrical devices from your computer and unplug the computer from its electrical outlet.
4. Disconnect all attached network devices and devices, such as keyboard, mouse, and monitor, from your computer.
5. Remove any media card and optical disk from your computer, if applicable.
6. After the computer is unplugged, press and hold the power button for 5 seconds to ground the system board.
7. Place the computer face down.

 **CAUTION:** Place the computer on a flat, soft, and clean surface to avoid scratches on the chassis or monitor screen.

Show all | Hide all

OptiPlex Micro Vertical Stand	
OptiPlex Micro Wall Mount	
OptiPlex Micro Desk Mount	
OptiPlex Micro Pro-2 E Series Monitor Mount	

- 1. Follow the instructions in the [Perform the following steps before working inside or on your computer.](#) section first.
- 2. Place the monitor on a soft cloth or cushion.
- 3. Remove the monitor back cover.
- 4. Install the four screws (M4x10) to secure the VESA mount on the monitor (**Figure 26**).

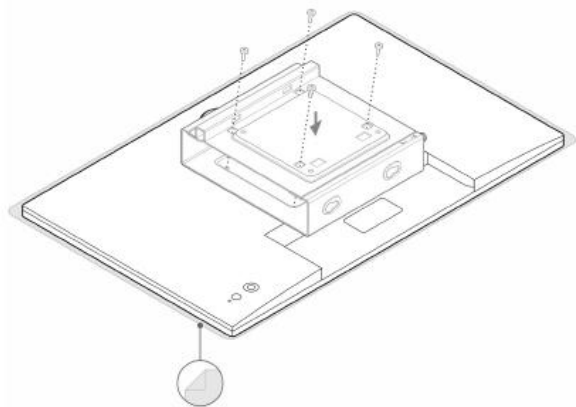


Figure 26: Installing the screws to secure the VESA mount on the monitor

- 5. Slide the computer into the VESA mount.
- 6. Tighten the thumbscrew to secure the computer to the VESA mount (**Figure 27**).

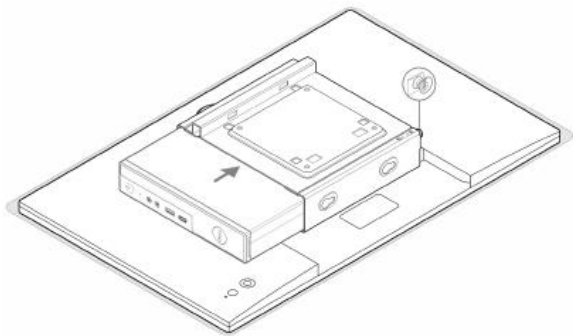


Figure 27:Tightening the thumbscrew to the VESA mount

- 7. Align the screws on the power adapter enclosure with the screw holes on the VESA mount and side the power adapter enclosure to lock it in place (**Figure 28**).

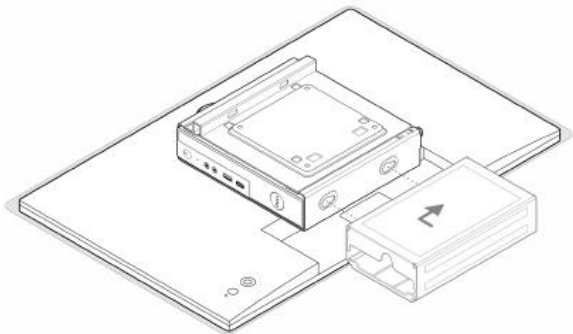


Figure 28: Aligning the screws on the power adapter enclosure and VESA mount

Compatible AC adapters
65 W AC adapter
90 W AC adapter
130 W AC adapter
180 W AC adapter

Table 1: Compatible AC adapters

- 8. Lift the monitor and insert the slots on the VESA mount into the hooks on the monitor arm until it clicks in place.

9. Tighten the screw (M4x12) on the monitor arm to secure the monitor to the monitor arm (**Figure 29**).

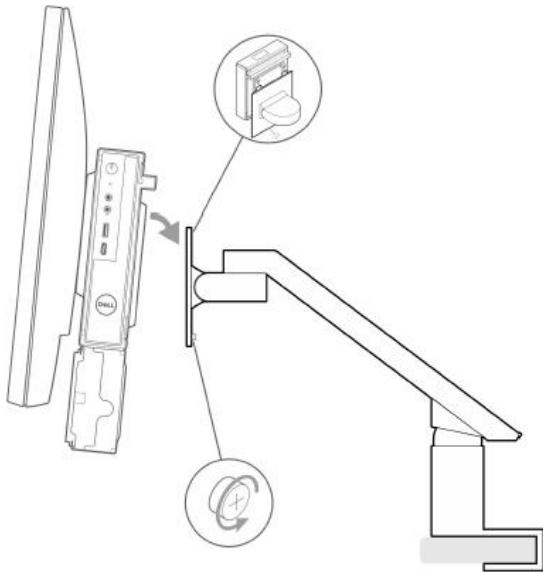


Figure 29: Tightening the screws on the monitor arm to the monitor

OptiPlex Micro All-in-One Stand - MFS22



Cause

No Cause Information Available

Resolution

No Resolution Information Available

Article Properties

Last Published Date

15 Nov 2022

Version

8

Article Type

Solution