


iRugged A10

10.1" Semi-Rugged Tablet

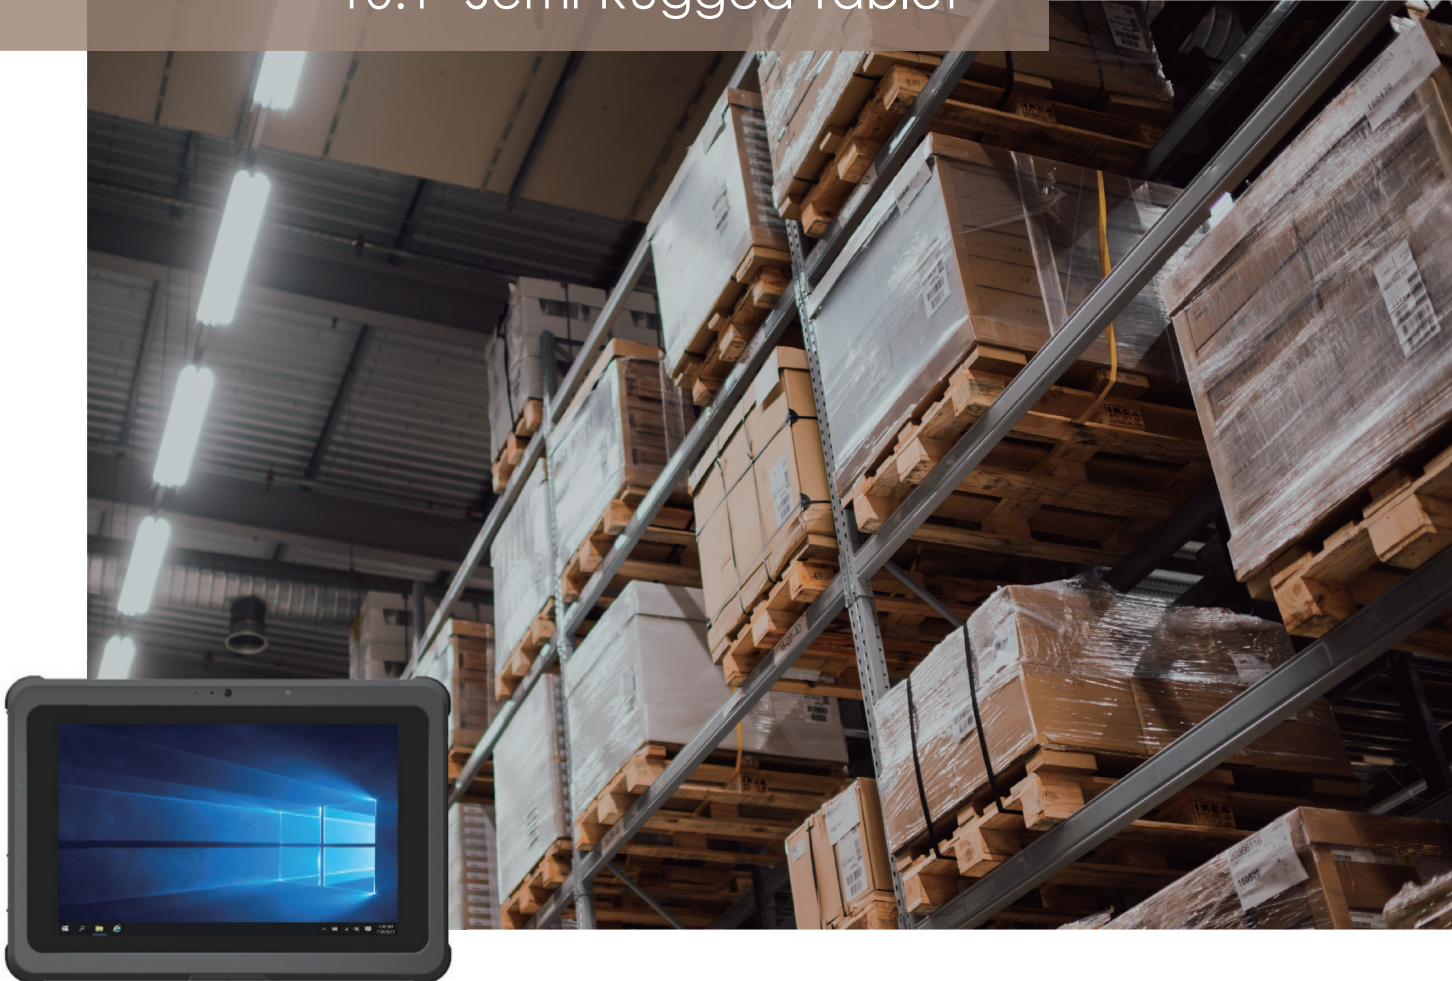

Features

- / Semi-rugged design with Intel Celeron N3350.
- / MIL-STD-810G & IP65 certified, 4-foot drop resistance.
- / 10.1" TFT color LCD 1280 x 800 HD.
- / Corning Gorilla Glass, 10 point projected capacitive multi- touch panel.
- / High mobility with multiple connectivity including WLAN, Bluetooth, NFC.
- / Light Design, Weight only 1Kg with Battery.
- / G-sensor, light sensor, 2M/8M Camera (Option 1D/2D Barcode scanner).

Specification

Model Name	iRugged A10		
System Information	Processor	Intel® Celeron® Processor N3350 (2M Cache, up to 2.4 GHz)	
	System Memory	Onboard LPDDR4 4GB	
Storage	Solid State Drive	M.2 128GB Solid State Drive	
	LCD Size	10.1"	
Display and Touch	Display Type	WXGA	
	Resolution	1280 x 800	
	Luminance	300 cd/m ²	
	Touch Type	10 Points Projective Capacitive	
	USB Port	2 x USB 3.0 Type A	
I/O	HDMI	1 x HDMI Output	
	Other	1 x Audio Jack 1 x Micro SD 1 x DC Jack	
	LED Indicator	1 x Power	
	System Control	Control Buttons	1 x Power Button 1 x Barcode Scanner Trigger
		Camera	2MP Front Camera 8MP Rear Camera With Auto Focus
Data Collection	NFC	ISO/IEC 14443 A/B, 15693/18092, NFCIP-1, NFCIP-2, Support MIFARE and Felica	
	Barcode Scanner	1D/2D Barcode Scanner (Optional)	
Wireless	WLAN	802.11 a/b/g/n/ac	
	Bluetooth	Bluetooth 5.0	
Certifications	Certification Information	Australia RCM Canada ICES-003 / IC China CCC / SRRC Chile SUBTEL Japan VCCI / MIC Taiwan BSMI / NCC USA FCC UK UKCA EU CE / RED / EN60601-1, EN60601-1-2 : Austria · Belgium · Czech Republic · Denmark · Finland · France · Germany · Greece · Hungary · Ireland · Italy · Latvia · Liechtenstein · Luxembourg · Netherlands · Norway · Poland · Portugal · Romania · Slovakia · Slovenia · Spain · Sweden · Switzerland Compliance : Costa Rica · Egypt · Hongkong · Sri Lanka	
		DC Input	+19V
Power Requirement	DC Input Connector	DC Jack	
	Adapter	Input: 100~240Vac/50~60 Hz Output: 65W Adaptor (19V@3.15A Adaptor)	
	Battery Operating Time	6 Hours	
	Battery	28.44W Li-ion Battery	
	Operating Temperature	0°C to 40°C (32°F to 104°F) 0°C to 30°C (32°F to 86°F) without dock or wall mount [EN60601] 0°C to 40°C (32°F to 104°F) with dock or wall mount [EN60601]	
Mechanical & Environmental	Storage Temperature	-20°C to 60°C (-4°F to 140°F)	
	Operating Humidity	15%~95% Relative Humidity, Non-Condensing	
	Weight	1Kg	
	Vibration Test	MIL-STD-810G Method 514.6 Procedure 1	
	Shock Test	MIL-STD-810G Method 516.6 Procedure 1	
	IP Rating	IP65	
	Dimension	281 x 193.3 x 19.95mm	
	Storage Humidity	5%~90% Relative Humidity, Non-Condensing	
Software	Drop	4-Feet Drop on Concrete Floor, MIL-STD-810G 516.6 Procedure IV	
	Construction	Rubber + Plastic	
In-Box Accessory	OS Support	Windows 10 IoT 64bit	
Component	Accessory	+19V 65W Power Adaptor	
	Microphone	Front Microphone	
Option Peripherals		Desktop cradle /USB2.0x3/LAN/DC19V, without Adaptor Wall Mount kit /USB2.0x3/LAN/DC19V, without Adaptor Battery charging station, DC19V/65W Adaptor Shoulder Strap	



Shoulder Strap



Desktop Cradle



Wall Mount Kit



3 Bay Battery Charging Station

1D/2D Barcode Scanner



HDMI USB 3.0 19V DC In



Contact

5F, No.59, Ln. 77, Xing-Ai Rd., Neihu Dist., Taipei City 114, Taiwan. R.O.C

+886 2 7721 4688

+886 2 7721 2289

sales@poindus.com

Poindus
COMPAL GROUP